NON–RETURN VALVES

FOR O.D. & N.B. TUBES

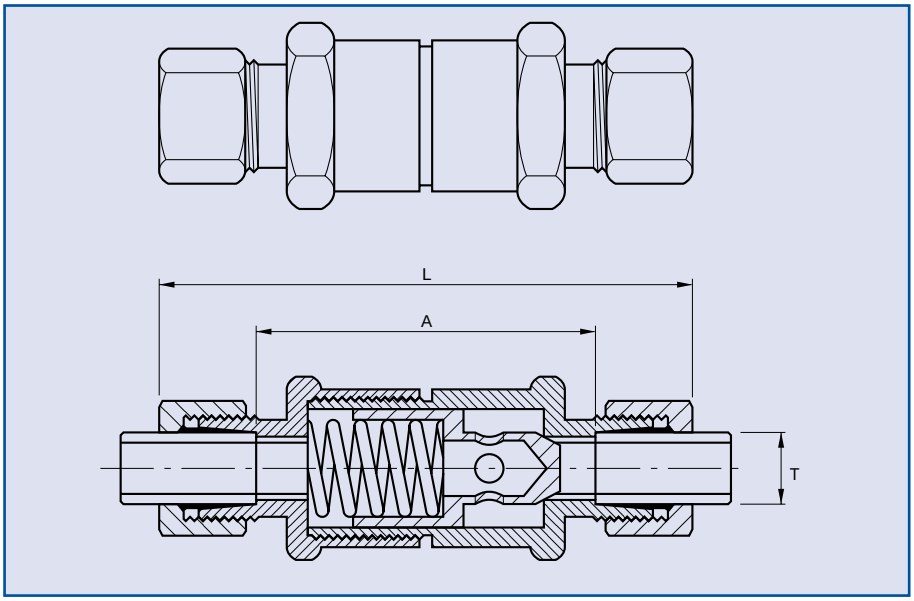

	Part N°	ØT	Tube Abutment A.	Approx. Length L.
O.D. Tubes	NRV 4	¼"	1⅜"	2²⁵⁄₃₂"
	NRV 5	⁵⁄₁₆"	1⁷⁄₁₆"	2²⁷⁄₃₂"
	NRV 6	⅜"	1²¹⁄₃₂"	3³⁄₃₂"
	NRV 8	½"	2¹⁄₃₂"	3¹⁷⁄₃₂"
	NRV 10	⅝"	1³¹⁄₃₂"	3¹⁷⁄₃₂"
	NRV 12	¾"	2¹³⁄₁₆"	4⁷⁄₁₆"
	NRV 14	⅞"	2¹³⁄₁₆"	4⁹⁄₁₆"
	NRV 16	1"	3⁵⁄₁₆"	5³⁄₁₆"
	NRV 20	1¼"	4¹³⁄₃₂"	6¹¹⁄₃₂"
	NRV 24	1½"	4³¹⁄₃₂"	7³⁄₃₂"
N.B. Tubes	NNRV 2	⅛"	1½"	3"
	NNRV 4	¼"	1²¹⁄₃₂"	3³⁄₃₂"
	NNRV 6	⅜"	1³¹⁄₃₂"	3¹⁹⁄₃₂"
	NNRV 8	½"	2¹³⁄₁₆"	4⁹⁄₁₆"
	NNRV 12	¾"	3⁵⁄₁₆"	5⁵⁄₁₆"
	NNRV 16	1"	4¹³⁄₃₂"	6¹¹⁄₃₂"
	NNRV 20	1¼"	5³⁄₃₂"	7⁹⁄₃₂"
	NNRV 24	1½"	5¹⁹⁄₃₂"	7³¹⁄₃₂"

For use in hydraulic circuits to prevent reversal in the direction of flow. All valves are tested for seating and spring pressure prior to despatch.

MATERIAL:

Male & Female body	Mild Steel, Zinc Plated
Piston	EN8

Standard valves are fitted with springs to lift at a pressure of 1.5 bar (20 p.s.i.). Alternative Springs can be fitted on request at extra cost.

VALVES COMPLETE WITH BETABITE INTEGRAL IMPERIAL TUBE CONNECTIONS

These valves are not suitable for gases or steam.

Part numbers indicated are for **Carbon Steel Couplings** only.

For **316 Stainless Steel Couplings**, add suffix **SS** to part number.