METRIC NON–RETURN VALVES

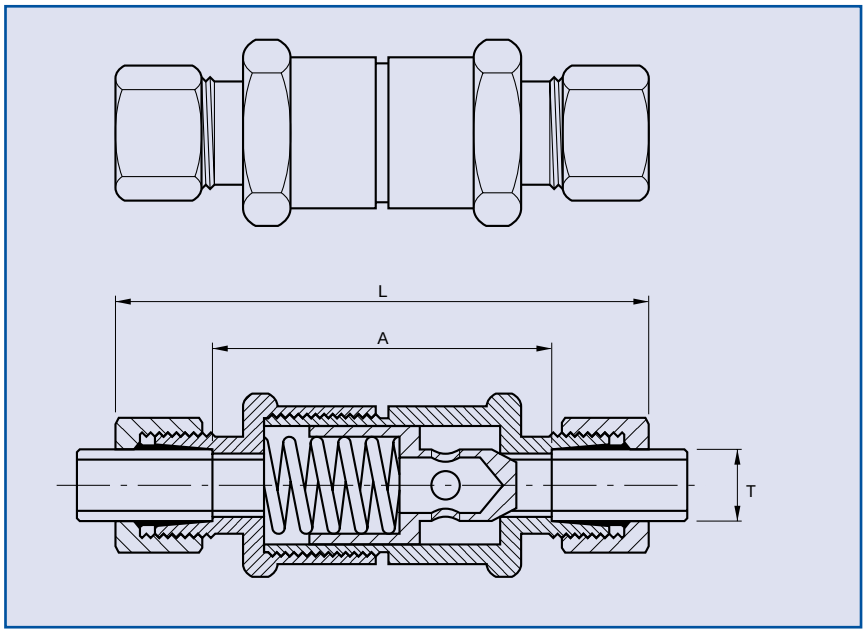

Series	NP	ØT	Part N°	Tube Abutment A	Approx. Length L
L	315	15	MNRV15L	59.5	96
L	315	18	MNRV18L	56.5	96
L	160	22	MNRV22L	78	124
L	160	28	MNRV28L	91	143
L	160	35	MNRV35L	119	178
L	160	42	MNRV42L	124	195
S	630	6	MNRV6S	43	73
S	630	8	MNRV8S	48	73
S	630	10	MNRV10S	48	83
S	630	12	MNRV12S	55	83
S	630	14	MNRV14S	59	97
S	400	16	MNRV16S	63.5	97
S	400	20	MNRV20S	76	124
S	400	25	MNRV25S	95	143
S	400	30	MNRV30S	119	172
S	315	38	MNRV38S	137	195

For use in hydraulic circuits to prevent reversal in the direction of flow. All valves are tested for seating and spring pressure prior to despatch.

MATERIAL:

Male & Female body	Mild Steel, Zinc Plated
Piston	EN8

Standard valves are fitted with springs to lift at a pressure of 1.5 bar (20 p.s.i.). Alternative Springs can be fitted on request at extra cost.

VALVES COMPLETE WITH BETABITE INTEGRAL IMPERIAL TUBE CONNECTIONS

These valves are not suitable for gases or steam.

Part numbers indicated are for **Carbon Steel Couplings** only.

For **316 Stainless Steel Couplings**, add suffix **SS** to part number.