


METRIC SHUT OFF VALVES

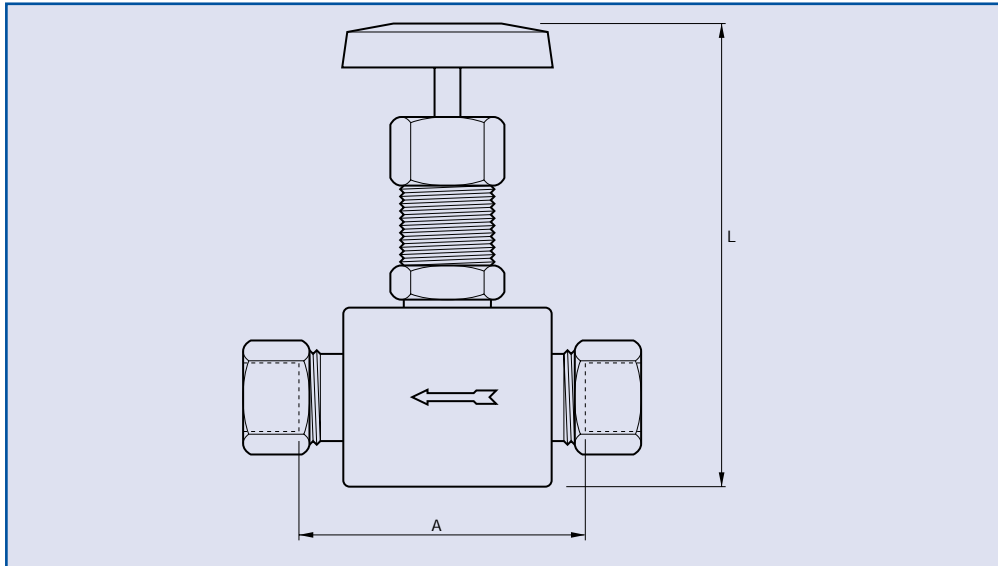

SHUT OFF VALVES

Series	N.P.	ØT	Part N°	Tube Abutment	Approx. Height	Panel Mounting Clearance Hole
L	315	15	MSOV15L	40	86	24
L	315	18	MSOV18L	43	92	27
L	160	22	MSOV22L	43	92	27
S	630	6	MSOV6S	32	83	20
S	630	8	MSOV8S	32	83	20
S	630	10	MSOV10S	36	84	24
S	630	12	MSOV12S	36	84	24
S	630	14	MSOV14S	40	86	24
S	400	16	MSOV16S	43	92	27
S	400	20	MSOV20S	43	92	27

Betabite High Pressure Shut Off valves are designed for use in hydraulic systems and are suitable for pressures up to 350 bar (5,000 p.s.i.) with flow in one direction. All valves are tested to 525 bar (7,500 p.s.i.). In the event that valves are to be used for systems other than oil hydraulics the medium to be passed through the valve should be stated, together with the pressure involved, to enable a suitable gland packing to be selected. The valves listed are machined with integral Betabite connections or female tapered ports. Solid cone spindles are supplied as standard.

MATERIAL:

Body, Stuffing Box, Retaining Washer and Gland Nut	Mild Steel, Zinc Plated
Spindle	Stainless Steel
Gland Packing	P.T.F.E.
Handwheel	Aluminium / Powder Coated

VALVES COMPLETE WITH BETABITE INTEGRAL METRIC TUBE CONNECTIONS

These valves are not suitable for gases or steam. Panel mounting of these valves is possible by the provision of a panel mounting gland nut. Please specify when ordering. The correct direction of flow is clearly marked by an arrow stamped on the valve body.

Part numbers indicated are for **Carbon Steel Couplings** only.
For **316 Stainless Steel Couplings**, add suffix **SS** to part number.